



FAST-BACK®

POWERED BRUSHLESS MOTOR



FAST-BACK® (FBK)

All-in-one fully digital DRIVE+MOTOR. The decentralized structure gives you much more freedom in designing your machine's layout. Installation, commissioning and service are much simpler. Many advantages such as cables and control cabinet space reduction. Motion controller and EMC line filter suppression are integrated.



STANDARD FEATURES

- ✓ Power supply 230 Vac three phase
- ✓ EMC line filter and in-rush circuit integrated
- ✓ Power supply for control circuits obtained from DC Bus
- ✓ Integrated regenerative circuit and power resistor
- ✓ Optical insulation between power stage and signals
- ✓ Integrated positioning control
- ✓ Feedback from encoder 2048 P/rev
- ✓ CAN BUS - CAN V2.0B standard (⚡ Optocoupled)
- ✓ CAN OPEN protocol implementations:
 - part of the DS301-V4.02
 - part of the DSP402-V2.0
- ✓ Fully programmable via RS232 (opto-isolated), Mod Bus-RTU based
- ✓ **Speeder-One®** software interface (Windows 98/2000/XP based)
- ✓ Multidrop interface RS232 to CAN BUS

OPTIONS

- ✓ Power supply 230 VAC single phase²
- ✓ Holding brake (internally controlled)
- ✓ Protection class: IP65, IP65S (with shaft sealing)
- ✓ Special flange and shafts available upon request
- ✓ Special windings
- ✓ 2 digital inputs (opto-isolated) 24 Vdc - 7 mA (PLC compatible)
- ✓ 1 digital output (opto-isolated) 24 Vdc - 50 mA (PLC compatible)
- ✓ 1 analog output programmable ±10 Vdc - 10 mA
- ✓ RS485 interface, Mod Bus - RTU based (⚡ Optocoupled) 230 Kbps max
- ✓ Safety Enable Function

SPECIFICATIONS

- ✓ Operating frequency 10 KHz
- ✓ Ambient temperature
 - operating at rated data: 0 ÷ 45°C (no derating)
 - rated and peak current derating: 45 ÷ 55°C (2.5%/°C)
 - maximum operating: 55°C max
 - storage: -20 ÷ 55°C
- ✓ Altitude A.M.S.L.
 - operating at rated data: 1000 m
 - rated and peak current derating: 1000 ÷ 2500 m (1.5 %/100m)
- ✓ Storage duration 1 year max*
- ✓ Protection class IP54

*: After 1 year storage duration the internal electrolytic power capacitors must be re-formed. Contact Axor's technical department for details.

TYPICAL APPLICATIONS

- food processing
- labelling equipment
- adjustment of formats
- medical equipment
- laser/water jet cutters
- pick-and-place equipment
- industrial printing
- limit stop adj. for wood, metal working machines
- size adj. for packing machines



SERIES		FBK 75				FBK 100		
SIZE		XS	S	M	L	S	M	L
Mo stall Torque ($\Delta t=100^\circ\text{C}$)	(Nm)	1.1	1.6	2.7	3.8	3.2	5.2	7.5
Mpk Peak Stall Torque (x 2 sec.)	(Nm)	3.3	4.8	8.1	10	10.3	10.5	15
Nn Rated speed ¹⁾	(Rpm)	3000	3000	3000	3000	3000	3000	2200
Mn Rated torque at Nn ($\Delta t=100^\circ\text{C}$)	(Nm)	0.95	1.35	2.35	3.3	2.8	4.5	6.4
Power Supply (grounded systems only)		230 VAC $\pm 10\%$ three phase (single-ph as optional feature) ²⁾						
Logic Supply (for back-up only)		24 Vdc ($\pm 10\%$) - 200mA						
Logic Supply (for back-up+brake)		24 Vdc ($\pm 5\%$) - 800 mA MAX						
J Rotor Inertia	(Kg m ²) · 10 ⁻⁴	0.4	0.6	1	1.4	1.8	2.8	3.8
Jb Brake Inertia	(Kg m ²) · 10 ⁻⁴	0.122				0.37		
BRAKE stall torque ($\Delta t=100^\circ\text{C}$) (24 Vdc +6% -10%)		4 Nm (0.5 Adc)				8 Nm (0.8 Adc)		
MODULE		2	3	5	7	3	5	7

NOTE ¹⁾: Rated speed refers at 230 VAC power supply three phase






²⁾: Single phase does not allow you to obtain the rated performance (torque and speed). Contact Axor's technical department for details.

★ AXOR IND. A COMPLETE LINE OF MOTORS AND SERVODRIVES ★

MECHANICAL DIMENSIONS



SHAFT AND KEY

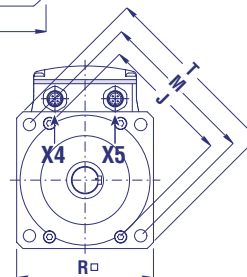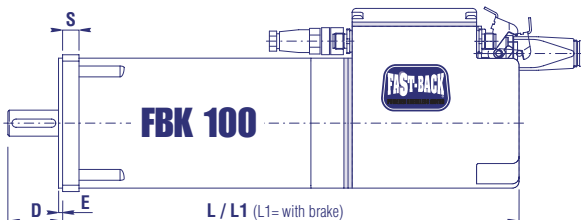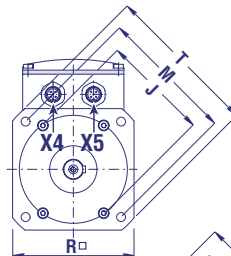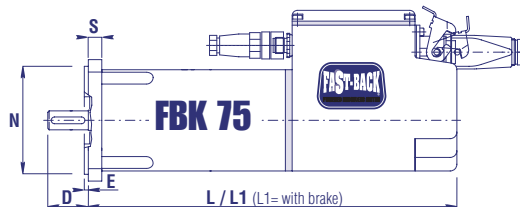


REFERENCES	L	L1	Bj6	D	Vh9	W	U	Nj6	M	F	J	F'	E	S	R	T	WEIGHT°	WEIGHT° with BRAKE
SERIES - Mo (Nm)	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	Kg	Kg
FBK 75 XS 1.1	230	280	11	23	4 x 18	12.5	M4x10	60	90	5.5	75	M5x8	2.5	10	75	100	2.85	3.45
FBK 75 S 1.6	245	295															3.3	3.9
FBK 75 M 2.7	275	325															4.2	4.8
FBK 75 L 3.8	305	355	14	30	5 x 25	16	M6x16	95	115	9	/	/	3	12	100	135	5.0	5.6
FBK 100 S 3.2	303	359	5.8	6.5														
FBK 100 M 5.2	338	394	7	7.7														
FBK 100 L 7.5	373	429	19	40	6 x 32	21.5	8.2	8.9										

CONNECTION DATA

POWER SUPPLY CONNECTOR X1

- 1 = L1 (Power supply)
- 2 = L2 (Power supply)
- 3 = +24 Vdc (back-up)
- 4 = L3 (Power supply)*
- 5 = 0 Vdc (back-up)
- ⊕ = PE



CAN BUS IN/OUT X2 - X3

- 1 = ⊕ PE / Shield
- 2 = CAN L
- 3 = PGND (OV CAN)
- 4 = CAN H

RS 485 IN/OUT

- 1 = ⊕ PE / Shield
- 2 = 485 B
- 3 = PGND (OV 485)
- 4 = 485 A



SIGNALS IN/OUT X4

- 1 = DGT-IN 1
- 2 = DGT-IN 2
- 3 = DGT-OUT 1
- 4 = DGT-IN/OUT RTN
- 5 = ⊕ PE / Shield




RS232 X5

- 1 = TXD
- 2 = RXD
- 3 = PGND
- 4 = AN-OUT 1
- 5 = AGND



*: for three phase power supply only

CHARACTERISTIC CURVES TORQUE VS. SPEED

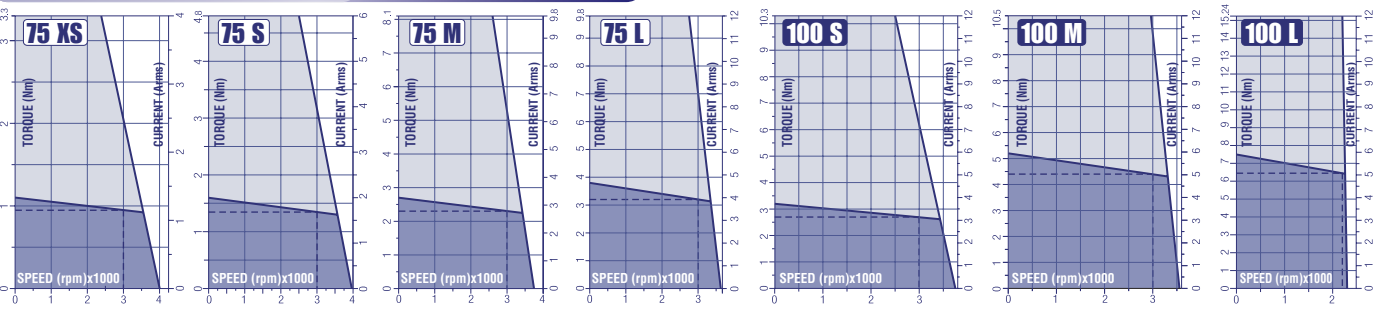

ORDERING CODE

Example:

FBK 75 M 30 / 220T 000D00X 0 T15 F0 FR 1 XX 000XX 00000 / 00000

HARDWARE

SOFTWARE

NAME: Line of Brushless Powered Motors

SERIES: 75, 100

SIZE: XS, S, M, L

NOMINAL SPEED Ex: 30=3000 Rpm

POWER SUPPLY MODE:
220T= 230 Vac three ph. (std)
220M= 230 Vac single ph. (opt)

HOLDING BRAKE:
0=without brake (std)
1=with brake (opt)

CONNECTION ORIENTATION:
FR=forward/rear exits (std for FBK 75)
TT=top/top exits (std for FBK 100)

AXOR internal use:
XX= std
+R= reducer presence(opt)

FLANGE & SHAFT

MOUNTING FLANGE:
000= standard (see above)
001-499= IEC metric dimension
501-999= Axor's internal code

MOUNTING HOLES:
D= B5 flange with thru holes (standard)
C= B14 flange with threaded holes (optional)

000 D 00 X = standard for all motors (see above)

SHAFT KEY:
x= with key (standard)
w= without key (optional)

SHAFT DIAMETER:
00= standard (see above)
01 - 49= IEC metric diameter
51 - 99= Axor's internal code

PROTECTION CLASS:
1= IP54 (std)
2= IP65 (opt)
3= IP65S with shaft oil seal (opt)

ELECTRICAL CONNECTIONS:

F0 = Flying Connectors, fixed part only (std)
1x(5p+⊕PE) bayonet power connector)
2x(M12/ 4p signals screw connector)
2x(M12/ 5p signals screw connector)

ADDITIONAL FEATURES:

0 0 0 X X

CBMD: CAN BUS+ MULTIDROP interf.
1= Present (std)
0= Not present (opt)

Not in use
Not in use

FEEDBACK:

T15 = 01H3506- 2048 p/rev (std for FBK 75)
T05 = 01H4808- 2048 p/rev (std for FBK 100)

RS485 Interface
1= Present (opt)
0= Not present (std)

SEF: Safety Enable Function
1= Present (opt)
0= Not Present (std)

